




GXR-S Series

Diagnostic X-ray System



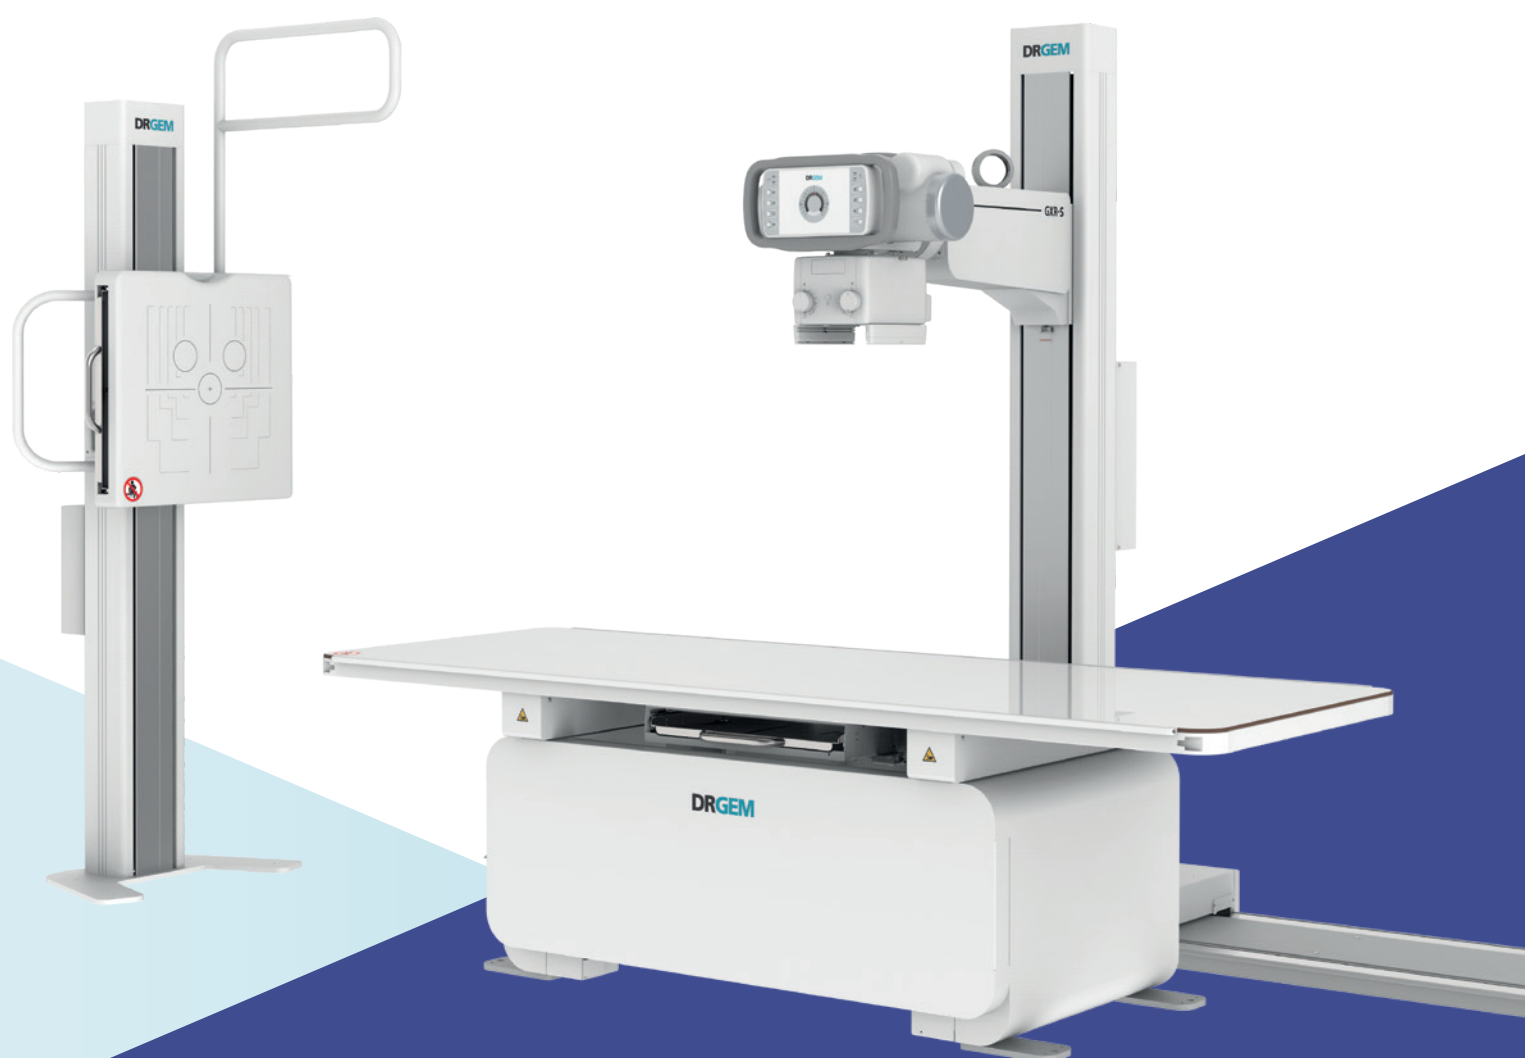

GXR Diagnostic X-ray System

Simple to Premium

The GXR diagnostic X-ray system matches with a radiographic room which perfectly fits your workflow. It can be easily upgraded to a DR system with the help of the DR interface and PC interface in the GXR generator, as well as the FPD(Flat Panel Detector) compatible Bucky.

The GXR X-ray system is equipped with a high frequency X-ray generator which consistently produces high quality X-ray output, with a very small kV ripple and accurate mA & mAs.

The GXR X-ray system is designed to provide convenience to the operator and comfort to the patient.

Floor Mounted Type



WBS

Wall Bucky Stand

Elegant design, durable and easy-to-use Wall Bucky Stand.



TS-FM6

Floor Mount Tube Stand

Floor Rail type tube stand provides smooth movement on the rail.



PBT-4

4 way Tabletop Patient Table

Large tabletop with extended travel enables all radiography studies with minimal patient movement. Fully flat tabletop without a frame on the edge makes cleanliness and odors free.


Floor Ceiling Suspended Type



WBS

Wall Bucky Stand

Elegant design, durable and easy-to-use Wall Bucky Stand.

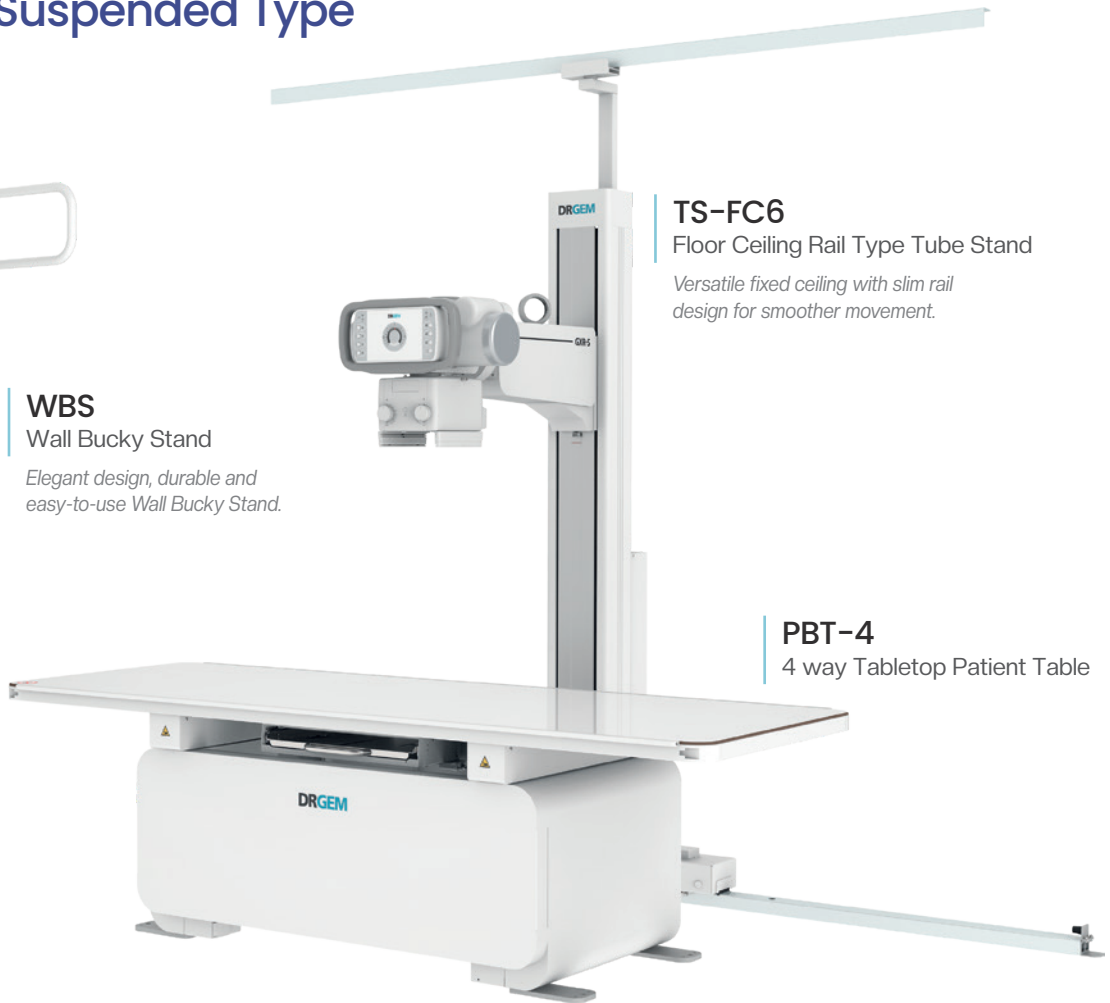

TS-FC6

Floor Ceiling Rail Type Tube Stand

Versatile fixed ceiling with slim rail design for smoother movement.

PBT-4


4 way Tabletop Patient Table

Premium Floor Mounted Type



WBS-TA

Wall Bucky Stand Automatic Tilting

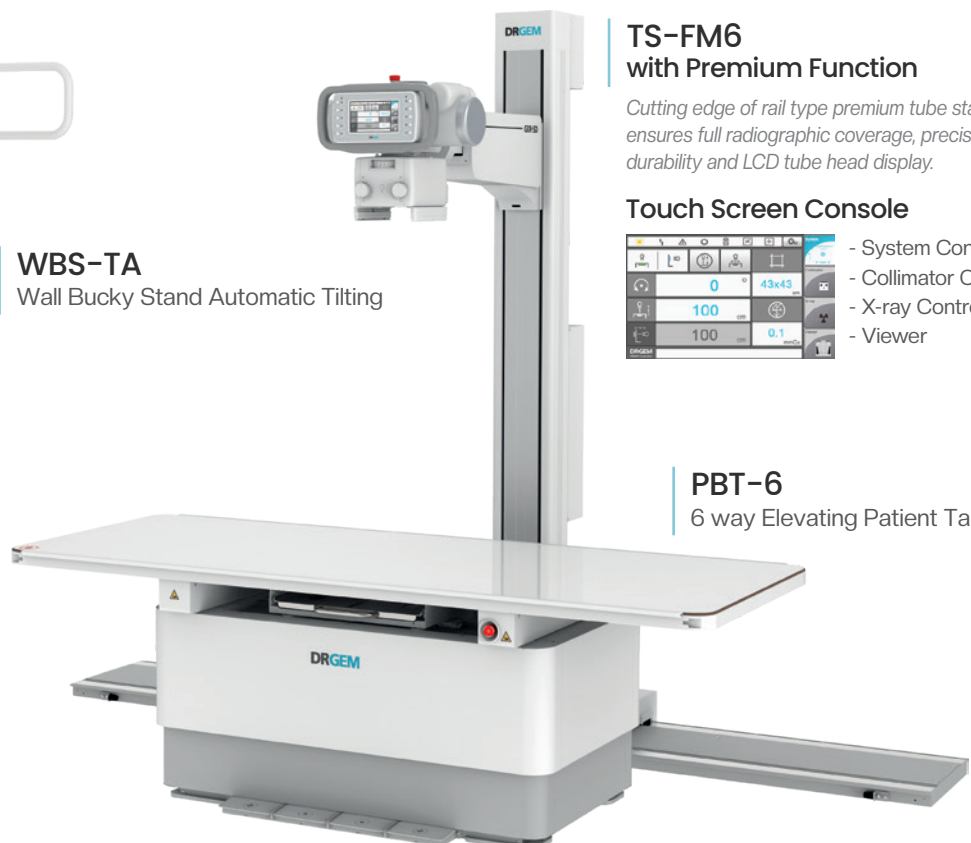


TS-FM6

with Premium Function

Cutting edge of rail type premium tube stand ensures full radiographic coverage, precision, durability and LCD tube head display.

Touch Screen Console




- System Control
- Collimator Control
- X-ray Control
- Viewer

PBT-6


6 way Elevating Patient Table

Premium Ceiling Type

Control Panel of Automatic Tilting Wall Stand



- Auto Positioning (User Programmable)
- Control of Synchronization with Tube Stand
- Motorized Collimation & Lamp Control
- Motorized Tilting Movement
- Motorized Vertical Movement

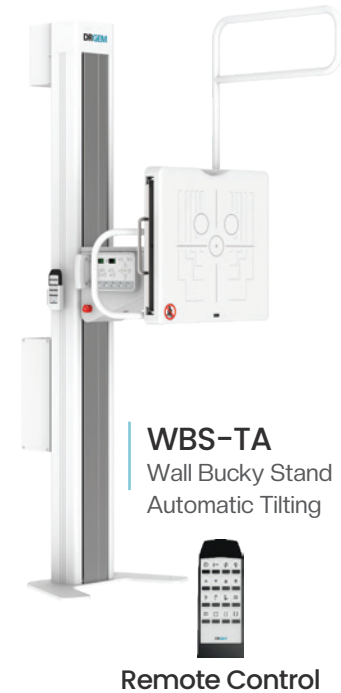

TS-CSA
Ceiling Suspended
Tube Stand



Touch Screen Console




- System Control
- Collimator Control
- X-ray Control
- Viewer




Optional Functions of Synchronization




Motorized Vertical
Synchronization with wall stand
WBS/WBS-TM/WBS-TA and TS-FM6/TS-CSA




Motorized Vertical
Synchronization with table
PBT-6 and TS-FM6/TS-CSA



Motorized
Table Bucky Tracking I
PBT-4/6 and TS-FM6/TS-CSA



Motorized
Table Bucky Tracking II
PBT-6 and TS-FM6/TS-CSA

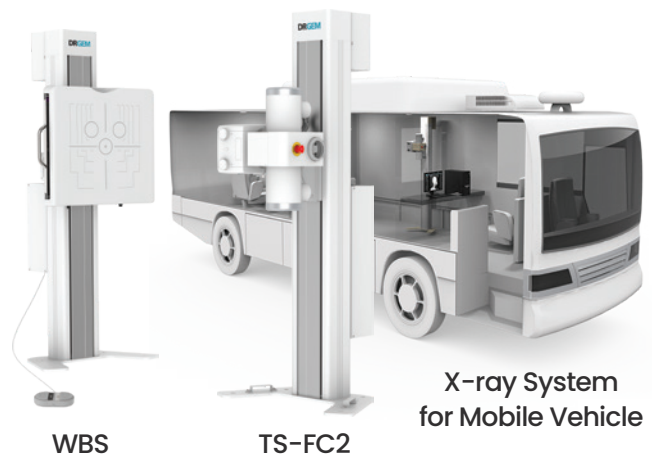

System

Model		GXR-32S	GXR-40S	GXR-52S	GXR-68S	GXR-82S	GXR-U32S	GXR-U40S	GXR-C32S	GXR-C40S	GXR-C52S
Output Rating		32kW	40kW	52kW	68kW	82kW	32kW	40kW	32kW	40kW	52kW
Generator Name		GXR-32	GXR-40	GXR-52	GXR-68	GXR-82	GXR-U32	GXR-U40	GXR-C32	GXR-C40	GXR-C52
Line Nominal, Phase		220-230VAC, 1Ø or 380/400/480VAC, 3Ø		380/400/480VAC, 3Ø			100-240VAC, 1Ø 1kVA		110-120/220-230VAC, 1Ø 3kVA		
Line Voltage Range		±10%(Frequency 50*/60Hz) *Outside North America									
Tube Voltage		40~125kV, 1kV Step (Optional 150kV)		40~150kV, 1kV Step			40~125kV, 1kV Step (Optional 150kV)				
Tube Current		10 to 400mA	10 to 500mA	10 to 640mA	10 to 800mA	10 to 1000mA	10 to 400mA	10 to 500mA	10 to 400mA	10 to 500mA	10 to 640mA
Time Range		1mS to 10S									
mAs Range		0.1 to 500mAs (Optional up to 1,000mAs)							0.1 to 500mAs		
Rotor Supply		Low Speed, Dual Speed (Option for 3Ø)		Low Speed, Dual Speed (Option)	Dual Speed		Low Speed (Optional LSS Brake)				
Reproducibility		Coefficient of Variation : kV < 0.005, Time < 0.005, mAs < 0.01									
Accuracy		kV < ±(1%+1kV), mA < ±(3%+1mA), Time < ±(1%+0.5ms), mAs < ±(3%+0.1mAs)									
Linearity		Coefficient of Linearity < 0.01 : CL = (X1-X2)/(X1+X2), where X is mR/mAs									
S/SD	Table	PDT-1, PBT-4, PBT-6									
	WBS	WBS, WBS-TM									
	Tube Stand	TS-FC2, TS-FC4, TS-FC6, TS-FM6, TS-CSA, TS-CSE									
	Tube	Focal Size: 1.0/2.0mm, 0.6/1.5mm, 0.6/1.2mm, Anode Heat Unit: 140, 150, 200, 230, 300, 400, 600kHU									
S/SD Premium (Motorized)	Table	PDT-1, PBT-4, PBT-6									
	WBS	WBS, WBS-TM, WBS-TA									
	Tube Stand	TS-FC2, TS-FC4, TS-FC6, TS-FM6, TS-CSA									
	Tube	Focal Size: 1.0/2.0mm, 0.6/1.5mm, 0.6/1.2mm, Anode Heat Unit: 140, 150, 200, 230, 300, 400, 600kHU									

Options

- AEC
- DAP(Dose Area Product) Meter
- Vertical tube synchronization
- Table Bucky auto tracking
- Lateral cassette holder
- WBS external cassette holder
- Line Laser
- Handgrips (Tabletop, WBS - Chest, Overhead)
- Electromagnetic switch for Tube Stand Rotation (FC or FM)
- 23 inch Touch Screen Console



Touch Screen X-ray Control Console

DRGEM

Your Best Healthcare

© DRGEM Corporation - All right reserved.

Reproduction in whole or in part is prohibited without the written consent of the copyright-holder.

Specifications and features are subject to change without notice.

All changes will be in compliance with regulations governing manufacture of medical equipment.

Address

HQ/R&D	7F/13F, E-B/D Gwangmyeong Techno-Park, 60 Haan-ro, Gwangmyeong-si, Gyeonggi-do, Korea (14322)
Gimcheon Factory	213, Saneopdanji-ro, Eomo-myeon, Gimcheon-si, Gyeongsangbuk-do, Korea (39536)
Gumi Factory	116-59, Sanho-daero, Gumi-si, Gyeongsangbuk-do, Korea (39377)



DRGEM Service Community

24 hours 7 days Customer Support
through Salesforce Service Cloud CRM